


FLEXIBLE WAVEGUIDE ASSEMBLIES

(TWISTABLE AND NON-TWISTABLE)

SERIES
15

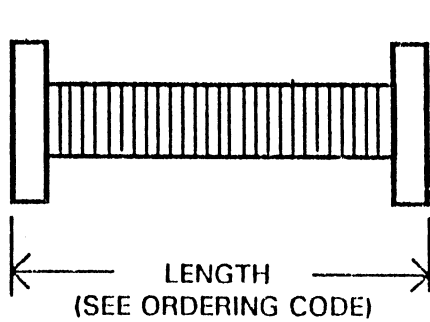

GENERAL INFORMATION

- FULL WAVEGUIDE FREQUENCY RANGE
- LENGTHS TO 60 INCHES

SPECIFICATIONS

BASIC MODEL	FREQ. RANGE (GHz)	EIA DESIG.	VSWR (max.)	INSERT. LOSS (dB max.)
15S	2.6-3.95	WR284	SEE DATA SHEET	.05
15SC	3.3-4.9	WR229		.06
15C	3.95-5.85	WR187		.07
15CA	4.9-7.05	WR159		.08
15A	5.85-8.2	WR137		.09
15XL	7.05-10	WR112		.10
15X	8.2-12.4	WR90		.15
15XK	10-15	WR75		.20
15KU	12.4-18	WR62	.25	

Ordering Code

MODEL	FLANGE	MAT'L	FINISH	LENGTH	OPTION
FROM ABOVE	1 - CPRF 2 - CPRG 3 - COVER 4 - CHOKE 5 - SPECIAL	A - ALUM B - BRASS C - COPPER D - SPECIAL	1 - IRIDITE 2 - SILVER 3 - SPECIAL	INCHES	J - JACKET JT - JACKET/TWISTABLE

INTERNATIONAL TELECOMMUNICATION COMPONENTS, INC.

94B East Jefryn Blvd, Deer Park, NY 11729

(516) 243-1444

FAX (516) 595-9160

I T C