


WAVEGUIDE FIXED ATTENUATORS

SERIES
16

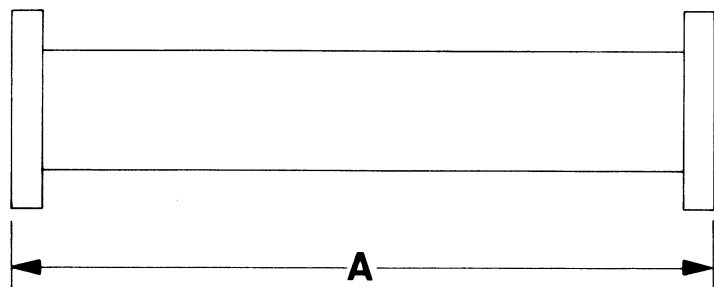

GENERAL INFORMATION

- FULL WAVEGUIDE FREQUENCY RANGE
- CALIBRATED AT CENTER FREQUENCY
- STANDARD EXTERIOR FINISH IS FLAT BLACK POLYURETHANE ENAMEL COLOR 37038 PER FED-STD-595
- ± 0.2 db ATTEN ACCURACY AT CALIBRATION FREQUENCY

SPECIFICATIONS

BASIC MODEL	FREQ. RANGE	EIA DESIG.	VSWR (max)	AVG. POWER (watts)	DIM (inches) A
16S	2.6-3.95	WR284	1.15	10.0	10.0
16SC	3.3-4.9	WR229	1.15	8.0	9.0
16C	3.95-5.85	WR187	1.15	5.0	8.5
16CA	4.9-7.05	WR159	1.15	5.0	8.0
16A	5.85-8.2	WR137	1.15	4.0	8.0
16XL	7.05-10.0	WR112	1.15	1.0	4.5
16XX	7.0-11.0	WR102	1.15	1.0	4.0
16X	8.2-12.4	WR90	1.15	1.0	3.5
16XK	10.0-15.0	WR75	1.15	1.0	3.5
16KU	12.4-18.0	WR62	1.15	1.0	3.0
16KK	15.0-22.0	WR51	1.15	1.0	2.5
16K	18.0-26.5	WR42	1.15	1.0	2.5
16T	22.0-33.0	WR34	1.15	1.0	2.0
16KA	26.5-40.0	WR28	1.15	1.0	2.0

Ordering Code

NOTES: 1-Std. Atten values are 3, 6, 10, 20db., other values available.

MODEL	FLANGE	MAT'L	FINISH	ATTEN (db)
FROM	1-CPRF	A-ALUM	1-IRIDITE	3
ABOVE	2-CPRG	B-BRASS	2-SILVER	6
	3-COVER	C-COPPER	3-SPECIAL	10
	4-CHOKE	D-SPECIAL		20
	5-SPECIAL			

INTERNATIONAL TELECOMMUNICATION COMPONENTS, INC.

94B East Jefryn Blvd, Deer Park, NY 11729

(516) 243-1444

FAX (516) 595-9160

I T C