


BROADWALL DIRECTIONAL COUPLERS

3 PORT, TERMINATED

SERIES
40

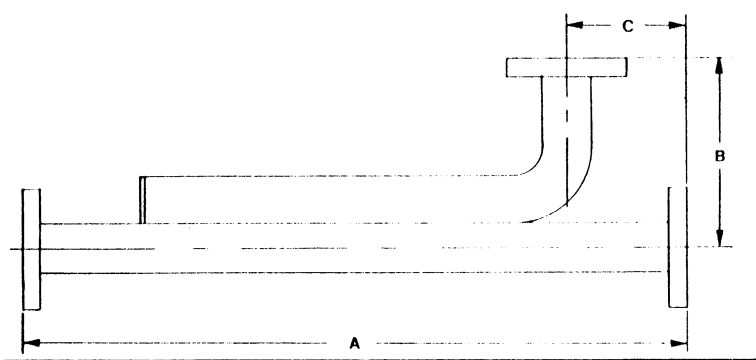

GENERAL INFORMATION

- EXCELLENT PERFORMANCE OVER ENTIRE WAVEGUIDE FREQUENCY RANGE
- UNITS PRESSURIZED UPON REQUEST
- PRECISION INTERNAL TERMINATION FOR OPTIMUM DIRECTIVITY
- STANDARD EXTERIOR FINISH IS FLAT BLACK POLYURETHANE ENAMEL COLOR 37038 PER FED-STD-595

SPECIFICATIONS

BASIC MODEL	FREQ. RANGE (GHz)	EIA DESIG.	VSWR ² (max.)		NOM. COUP. (dB)	FREQ. SENS. (dB)	DIREC-TIVITY (dB)	DIM. (inches)		
			PRI.	SEC.				A	B	C
40L ¹	1.12-1.7	WR650	1.05	1.10	±.5	±.6	40	37	8	4
40M ¹	1.7-2.6	WR430	1.05	1.10	±.5	±.6	40	35	6	4
40S	2.6-3.95	WR284	1.05	1.10	±.5	±.6	40	31	6	3.5
40SC	3.3-4.9	WR229	1.05	1.10	±.5	±.6	40	28	5	3.5
40C	3.95-5.85	WR187	1.05	1.10	±.5	±.6	40	25	4	3
40CA	4.9-7.05	WR159	1.05	1.10	±.5	±.6	40	23	3	2.75
40A	5.85-8.2	WR137	1.05	1.10	±.5	±.6	40	20	3	2.25
40XL	7.05-10	WR112	1.05	1.10	±.5	±.6	40	18	2.5	2
40X	8.2-12.4	WR90	1.05	1.10	±.5	±.6	40	17	2	1.75
40XK	10-15	WR75	1.05	1.10	±.5	±.6	40	15	1.5	1.5
40KU	12.4-18	WR62	1.05	1.10	±.5	±.6	40	13	1.25	1.25
40K	18-26.5	WR42	1.10	1.15	±.75	±.75	35	11	1.25	1.25
40KA	26.5-40	WR28	1.10	1.15	±.75	±.75	35	10	1	1

Ordering Code

NOTES: 1 - available in aluminum only
2 - VSWR slightly higher for 3.6dB

MODEL	FLANGE	MAT'L	FINISH	COUPLING
FROM ABOVE	1 - CPRF 2 - CPRG 3 - COVER 4 - CHOKE 5 - SPECIAL	A - ALUM B - BRASS C - COPPER D - SPECIAL	1 - IRIDITE 2 - SILVER 3 - SPECIAL	3 - 3dB 6 - 6dB 10 - 10dB 20 - 20dB 30 - 30dB

INTERNATIONAL TELECOMMUNICATION COMPONENTS, INC.

94B East Jefryn Blvd., Deer Park, NY 11729

(516) 243-1444

FAX (516) 595-9160

I T C